


H16F Fiber Converter

Specification


H16F

Features

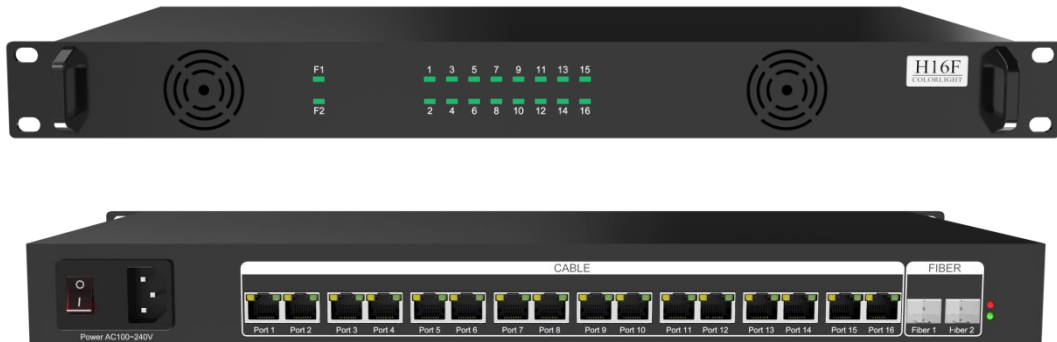

- Distributed feedback laser diode (DFB LD)
- Single mode twin-core fiber (TCF)
- Up to 20Gb/s data links
- Fiber module with 2Km transmission distance
Fiber module with 20Km transmission distance (optional)
- Multi-source package with full-duplex LC connector
- Plug-and-play
- Eye-safety designed to meet laser class 1

Interface Description

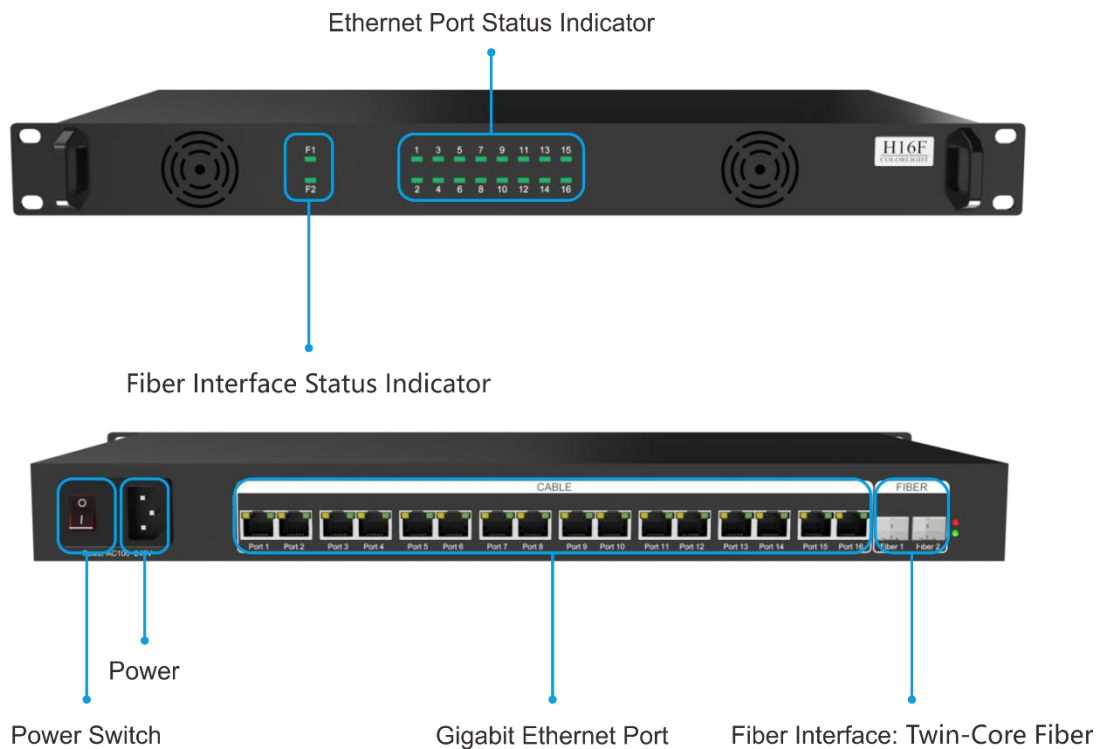


Parameters Description

Storage Temperature	-40 ~ 85℃
Operating Temperature	0 ~ 70℃
Power	AC 100~240V
Data Rate	20Gb/s
Working Mode	Single-Mode
Transmission Distance	Fiber module of 2Km, fiber module of 20Km (optional)
Fiber Interface Type	Full-duplex LC
Laser	DFB
Gigabit Ethernet Port	16 ports×RJ45
Fiber Interface	2 ports×10G bandwidth

Diagrams

In conjunction with Z6

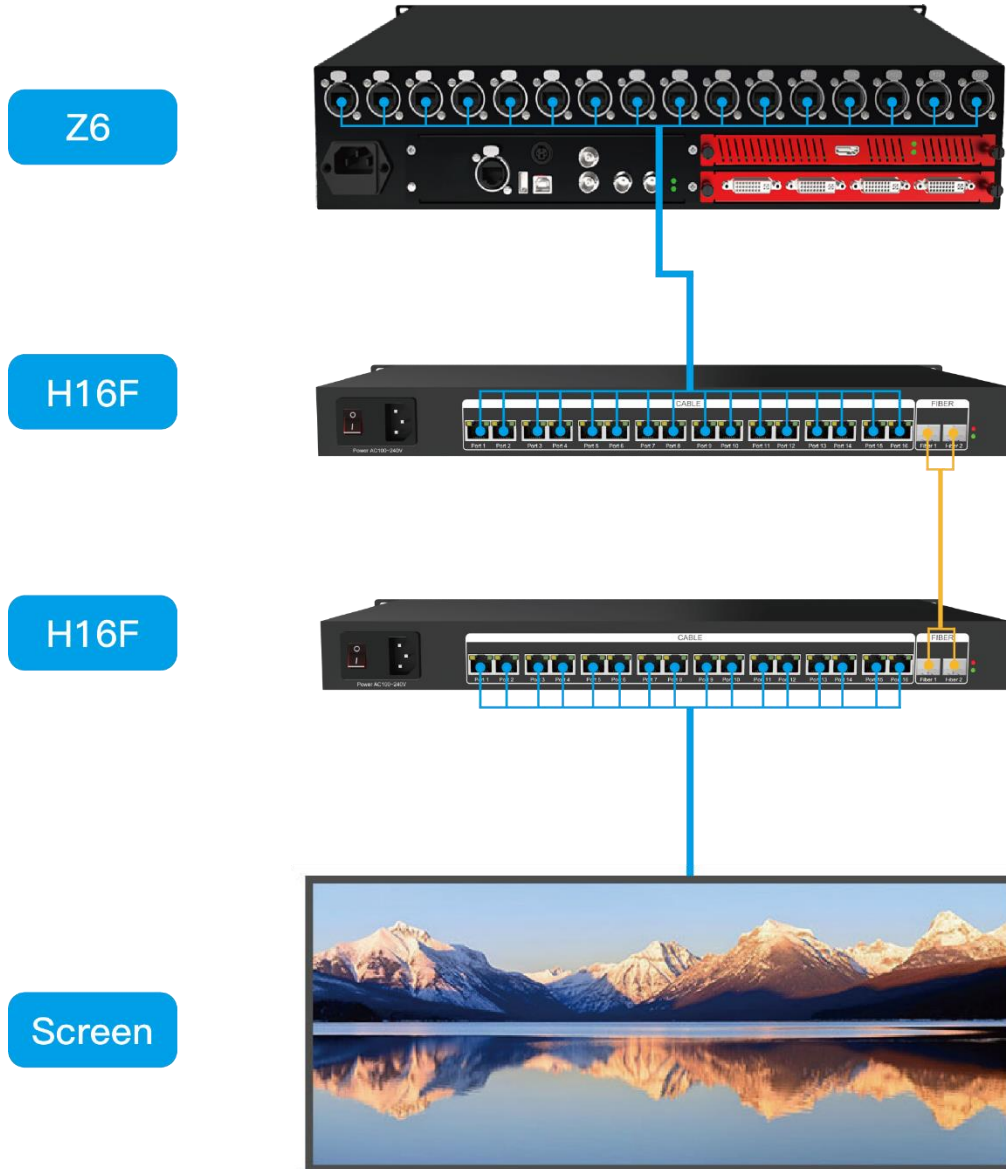

Dimension

Unit: mm

